




PVC BLACK PROTECTION TAPE

Product Features

Premium Grade
Polyvinyl Chloride
Film Coated
with Solvent
Rubber Adhesive

Application

Ideally suited for
protection against
rusting, dirt, UV, or
scratches on the
aluminium surface in a
short term basis

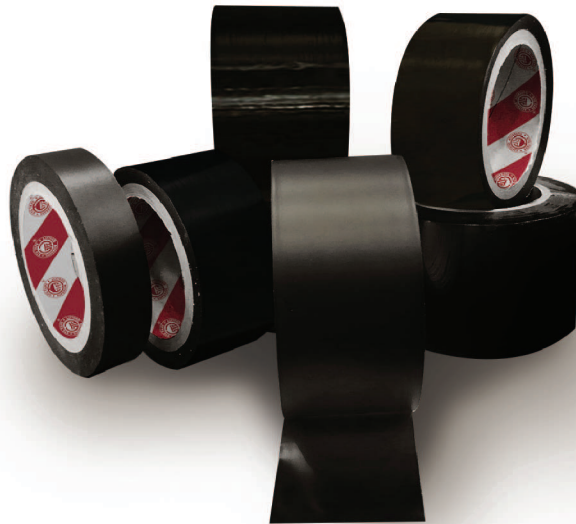

Black

Shelf Life

12 Months Storage at 23°C and 65%
Relative Humidity

Technical Data

Product	Total Thickness		Peel Adhesion (N/in)	Tensile Strength ASTM D-3759 (N/cm)	Elongation % at break ASTM D-3759
	(um)	(mil)			
BT12	120	4.7	1.5	20	130%
BT13	130	5.1	1.5	20	130%
BT15	150	5.9	1.5	20	130%

Product Characteristics

- Excellent tack adhesive with unique durable properties
- Bacteria and fungus resistant
- Premium grade adhesive with high degree of softness allow for a well-fit surface
- Possess characteristics of improving flame resistance as well as high voltage insulation
- Highly resistant to UV, water, oil, acids and corrosive chemicals
- Anti-abrasion due to feature of high resistance against solvent and climate temperature
- Strong anti-aging properties
- Ideal for long storage and maintain high viscosity even extreme variation in temperature
- Nature-friendly product which is harmless upon environment

Product Sizes

Log Roll Size : 1250mm x 40m
Core Size : 76mm
Cut Size : 50mm x 33m (*Custom sizes available)

Disclaimer : While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose.