

PVC AUTOMOTIVE WIRE HARNESS TAPE



Product Features

A Thin Premium Grade Polyvinyl Chloride Film Coated With Natural Rubber Adhesive

Application

Suitable as repairing material for fixing loose part of automobiles, coil wrapping, anchoring, harnessing, holding and insulating wrapping of electric wire and cables below 600 Volts

Product Sizes

Jumbo Roll Size :1260mm x 20m
Paper Core Size :32/38mm

* Contact sales representative for available sizes




GTG MANUFACTURING SDN. BHD. (968289-M)

Website: www.gtgroup.com.my

Tel: +603-8725 9988 | Fax: +603-8725 9989 | Email: info@gtgroup.com.my

Colours

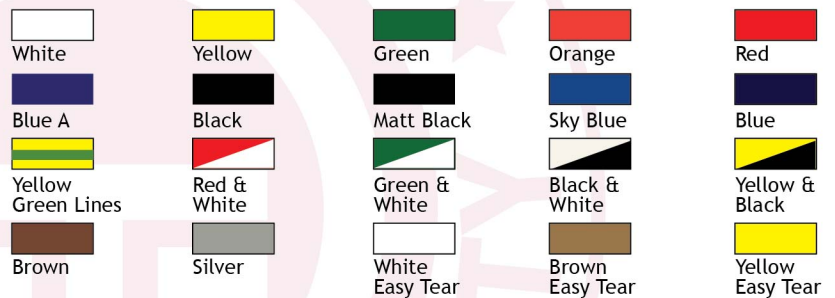

Technical Data

| Product | Total Thickness | | Temperature Resistance | Peel Adhesion ASTM D-1000 (N/cm) | Strength to Backing ASTM D-3330 (N/cm) | Tensile Strength ASTM D-1000 (kv) | Elongation % at break ASTM D-3759 | Break down voltage ASTM D-1000 (kv) |
|---------|-----------------|-------|------------------------|-------------------------------------|---|--------------------------------------|--------------------------------------|--|
| | (um) | (mil) | | | | | | |
| ITEB11 | 110 | 4.3 | 80 | 1.2 | 1 | 16 | 160% | 6 |

Product Characteristics

- Resists chemicals and solvents
- Excellent thermal & electrical insulator
- Provides high resistance to UV rays, abrasion, moisture, corrosion and varying weather conditions
- Excellent wrapping results and well conformable on applications due to strong tack adhesive

Shelf Life

12 Months Storage at 23°C and 65% Relative Humidity

Disclaimer : While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose.

