


PVC EASY TEAR TAPE

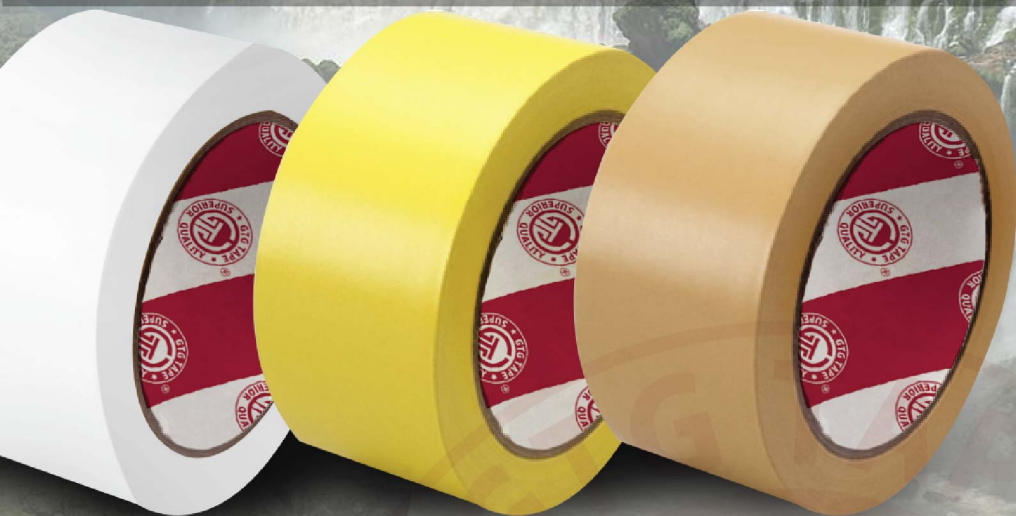

Product Features

Premium Grade Polyvinyl Chloride Film Coated with Solvent Rubber Adhesive

Application

Apply for carton sealing, surface protection, light duty packing, bundling, holding, construction, repairing, piping, and other applications where a pressure-sensitive tape is needed

Product Sizes

Log Roll Size :1250mm x 33m
Paper Core Size :76mm

* Contact sales representative for available sizes

Colours



White



Brown



Yellow

Technical Data

Product	Total Thickness		Peel Adhesion (N/in)	Tensile Strength ASTM D-3759 (N/cm)	Elongation % at break ASTM D-3759
	(um)	(mil)			
ETT15	150	5.91	2.5	20	130%
ETT18	180	7.08	2.5	22	130%

Product Characteristics

- Easy tear by hand
- Resistant to corrosive salt water, soil acids, alkalis and salts, common chemicals, chemical vapours
- Excellent tack adhesive with unique durable properties
- Premium grade adhesive with high degree of softness allow for a well-fit surface
- Highly conformable
- Good thermal and electrical insulator

Shelf Life

12 Months Storage at 23°C and 65% Relative Humidity

Disclaimer : While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose.



GTG MANUFACTURING SDN. BHD. (968289-M)

Website: www.gtgroup.com.my

Tel: +603-8725 9988 | Fax: +603-8725 9989 | Email: info@gtgroup.com.my

