


PROTECTIVE FILM FOR STAINLESS STEEL



Product Features

Special Formulated Polyethylene Film as Substrate and Solvent/Water as Pressure Sensitive Adhesive

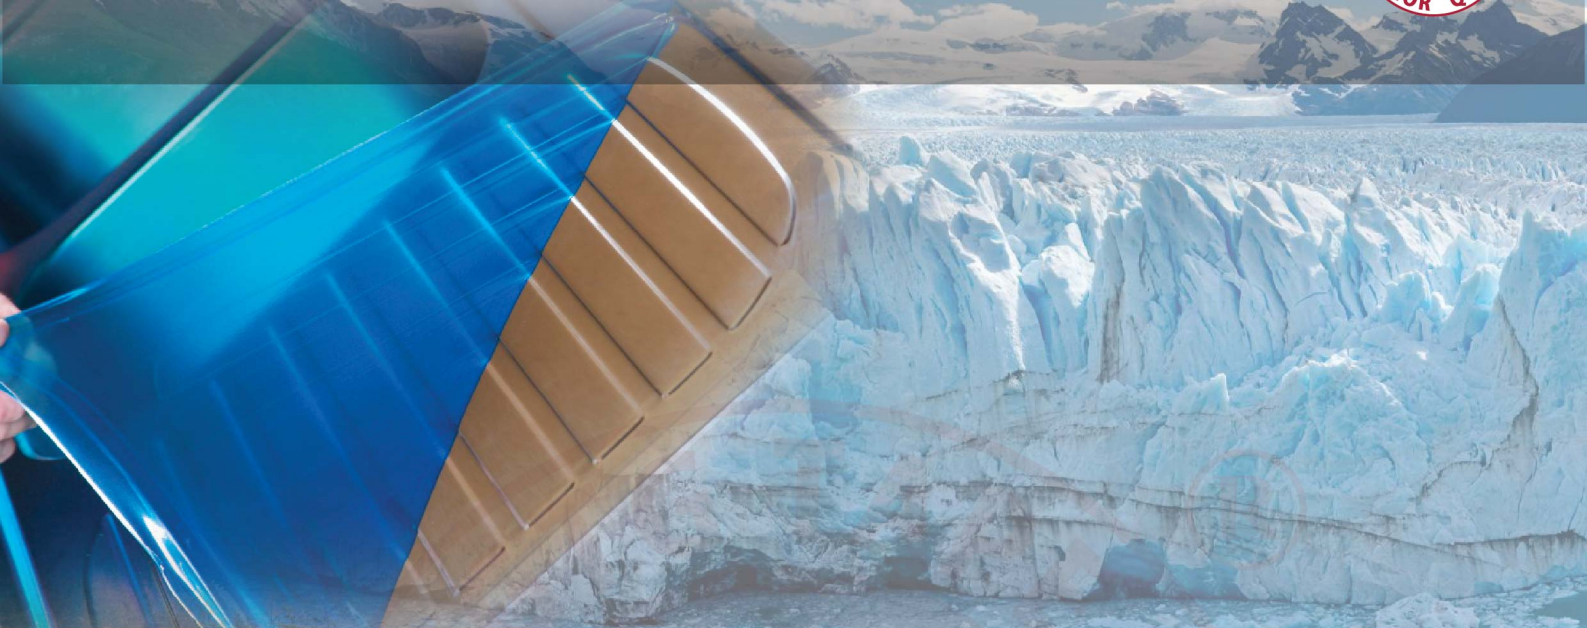

Application

Provide surface protection for stainless steel sheet, aluminium alloy sheet and other metal sheet during deep drawing process



Colours



Technical Data

Base Film Thickness (µm)	30-200
Adhesive Thickness (µm)	2-20
Peel Strength 180°C (g/cm)	100-250
Horizontal Elongation at Break (%)	600-800
Vertical Elongation at Break (%)	250-450
Heat Resistance (°C)	60

Product Characteristics

- Easy to stick
- Easy to peel off without residue left
- Anti-corrosion
- Not easy unglued under the deep draw process within 18cm

Product Sizes

Roll Size : (500-2100)mm x (500-1500)m

Shelf Life

12 Months Storage at 23°C and 65% Relative Humidity

Disclaimer : While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose.



GTG MANUFACTURING SDN. BHD. (968289-M)

Website: www.gtgroup.com.my

Tel: +603-8725 9988 | Fax: +603-8725 9989 | Email: info@gtgroup.com.my

