

STICKY MAT



Product Features

Made of low density Polyethylene with water-based acrylic adhesive

Application

Sticky Mat normally used in clean rooms premises, museums, laboratory, premium showrooms, hospitals, world premiere, premium hotels and child-care centers.

Product Sizes


Size : * Custom made size available

Product Characteristics

- Provide a fast, convenient, reliable way to clean shoe soles or other items before entering a clean and sanitary area
- Significantly reduce traffic-borne contaminants
- Numbered corner tabs for easy tracking of remaining sheets
- Easy sheet -to-sheet removal
- Non-transferring adhesive
- Smooth, effective surface is not damaged by shoes, booties or cart wheels
- Glossy and no bubble surface, no wrinkles

Technical Data

| Subject | Measured Value |
|--|--------------------------------|
| Size | 600*900mm ±3mm/customized |
| Thickness | 0.025-0.05MM(2,5C-5C) ±0.004mm |
| Longitudinal Tensile Strength (MPa) | ≥10 |
| Transverse Tensile Strength (MPa) | ≥8 |
| Longitudinal split elongation rate (%) | ≥250 |
| Transverse split elongation rate (%) | ≥750 |
| 180 degree peeling strength (g/25mm) | 250±50g |
| Tackiness | Low/Middle/High |
| Layer | 30 layers |
| Usage | Medical / Cleanroom and others |

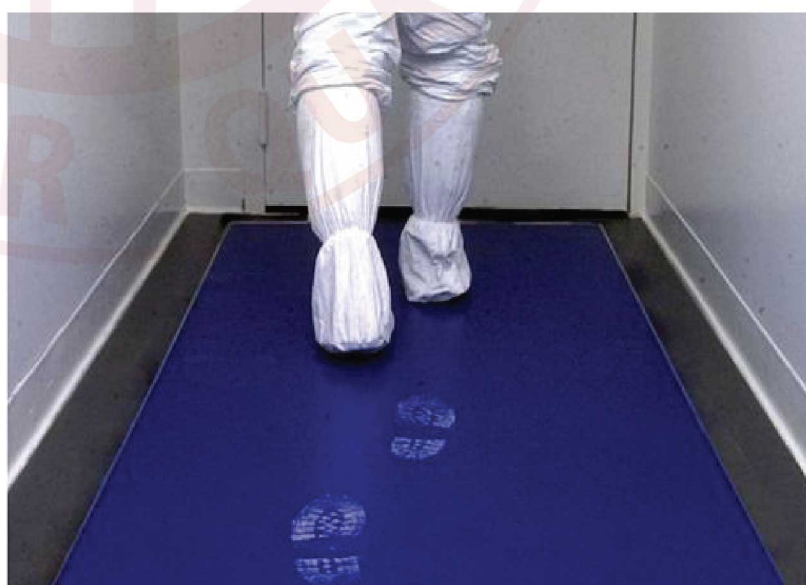

Disclaimer : While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose.



GTG MANUFACTURING SDN. BHD. (968289-M)

Website: www.gtgroup.com.my

Tel: +603-8725 9988 | Fax: +603-8725 9989 | Email: info@gtgroup.com.my

